

RIVER WATER TREATMENT SYSTEM





River Water Treatment Systems are Preferred In Those Areas


- * The villages and rural areas
- * Current temporary areas
- * Industrial zones
- * Industrial facilities
- * Construction fields
- * Military regions
- * Refugee camps
- * Construction site and field



River water contains too much particles. The high amount of particles are removed from the water by river water treatment systems.


River water treatment systems are designed specially for drinking or domestic water according to your demands.

RIVER WATER TREATMENT SYSTEMS CAPACITIES

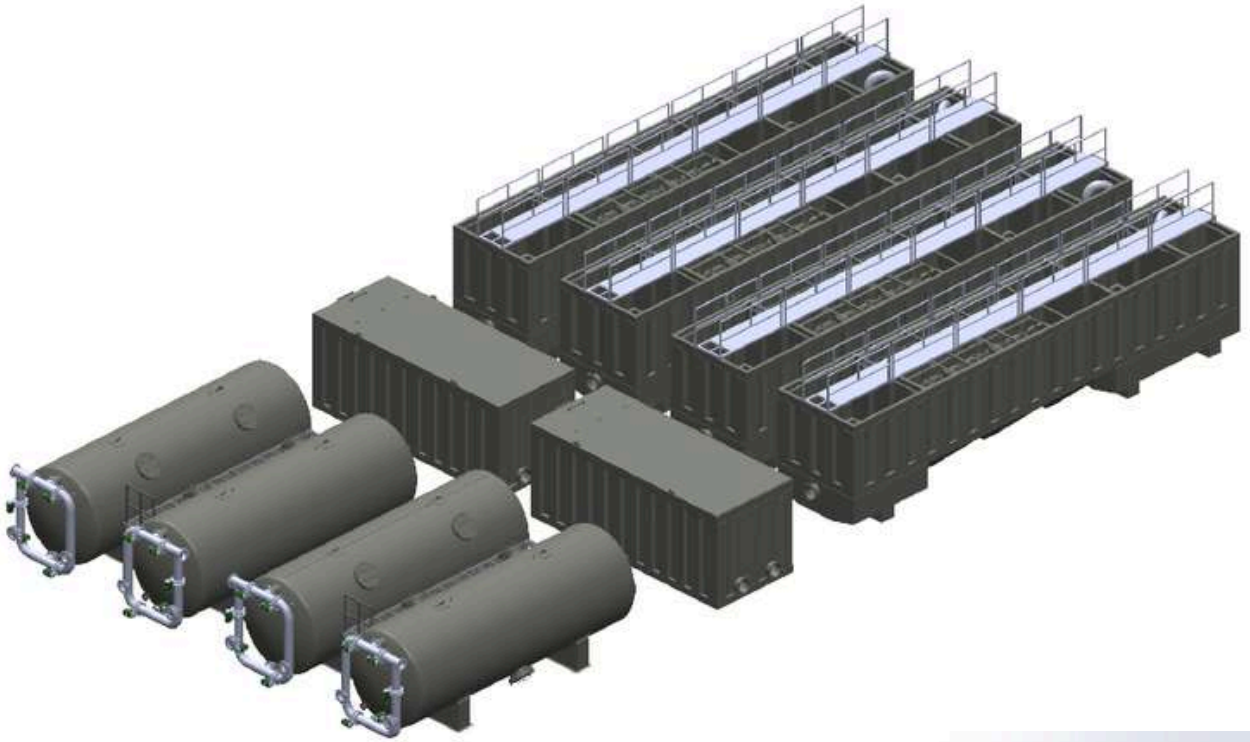


- *50 m³/h
- *100 m³/h
- *200 m³/h
- *300 m³/h
- *400 m³/h
- *500 m³/h



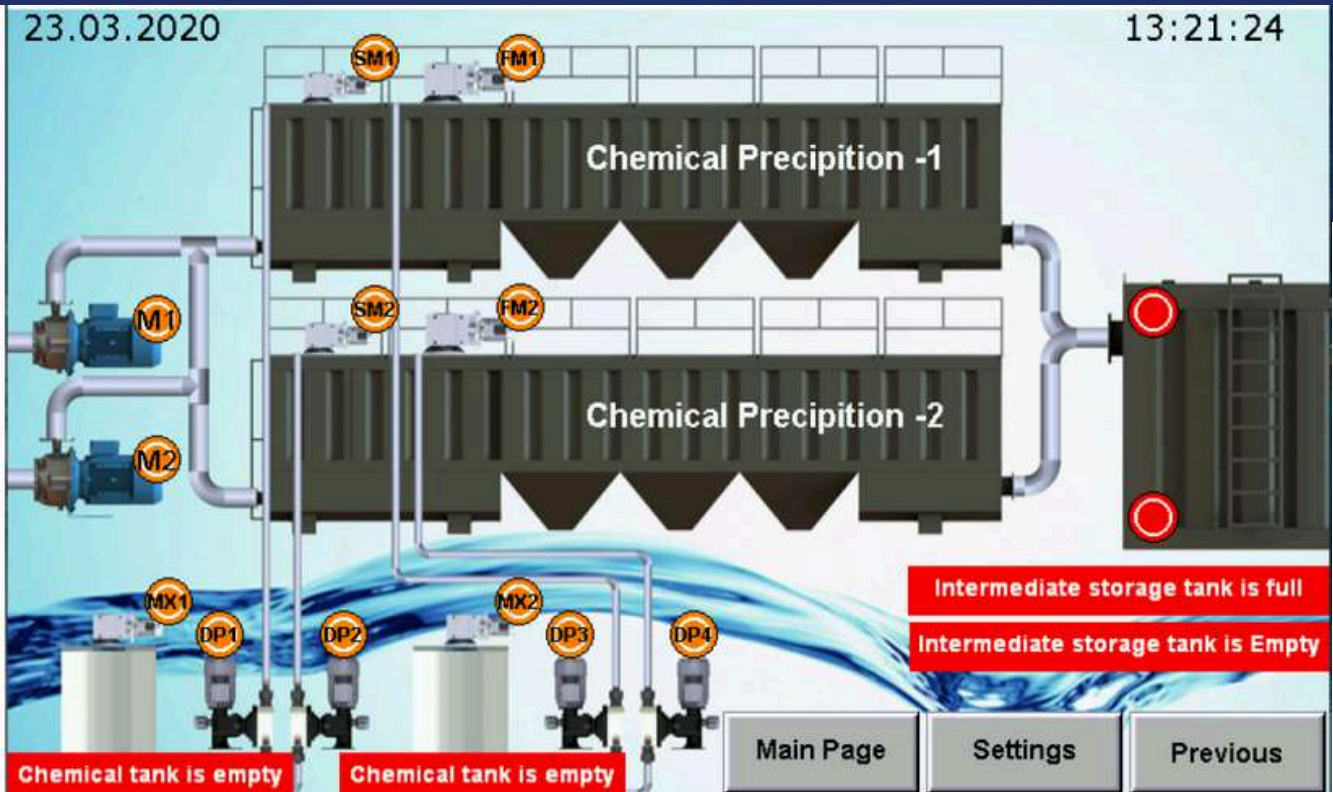

*The precipitation system screen design.

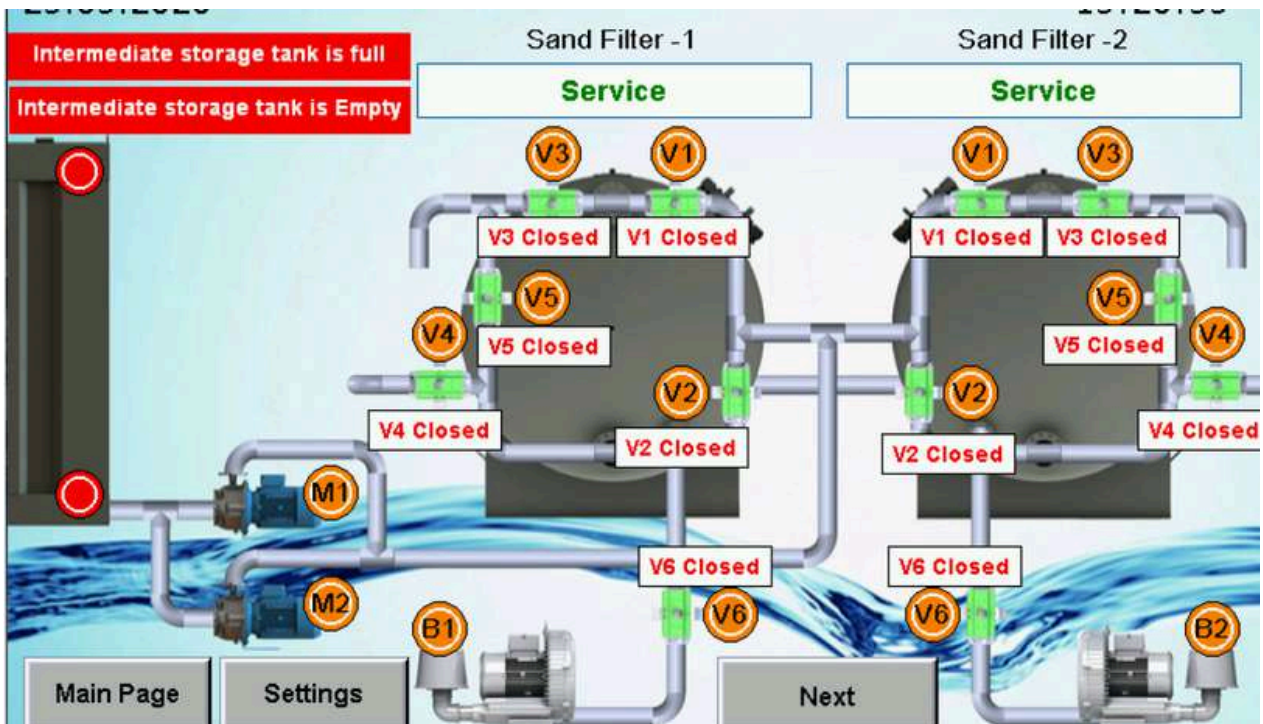

* Sand filter and chemical precipitation system user manual


SAND FILTER



Sand filters ensure that suspended substances are retained in water. Sand filters also benefit from the subsequently integrated systems. These filters remove the residue and particles that cause turbidity in the water.

There are three main types of sand filters; fast (gravity) sand filters, upstream sand filters and slow sand filters. All three methods are widely used in the water industry worldwide.

While the first two require the use of flocculant chemicals to work efficiently, slow sand filters can produce very high-quality water, without the need for chemical aids, with 90% to 99% (depending on the pressure) .

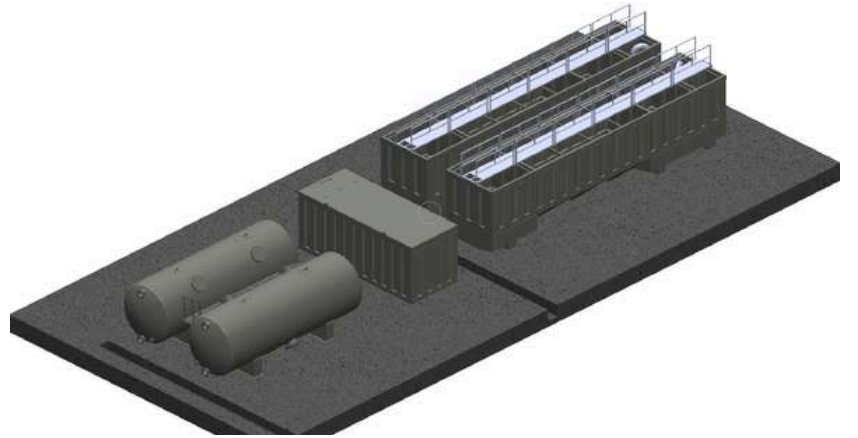

PRECIPITATION SYSTEM


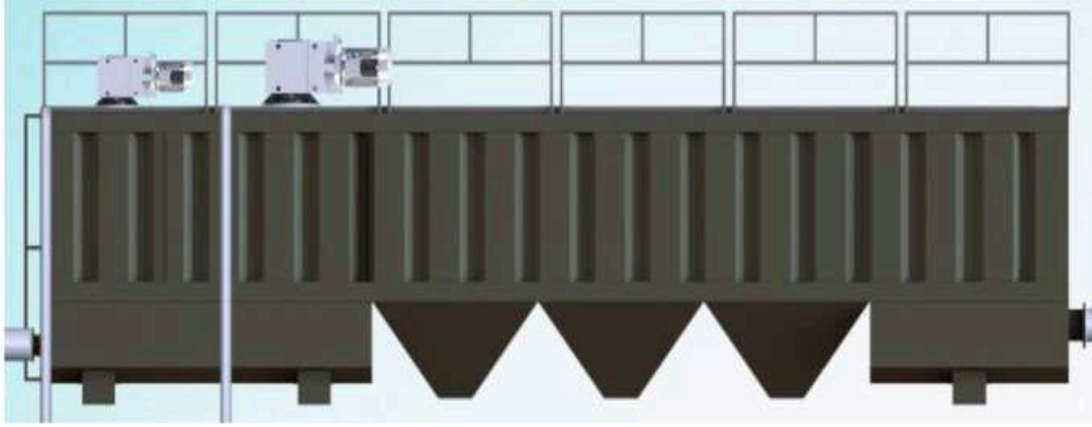


Figure 2 (Precipitation Unit)

Chemical precipitation is a basic process, defined as facilitating the removal of chemicals dissolved in water, by precipitation, by changing the physical state of dissolved or suspended solids.

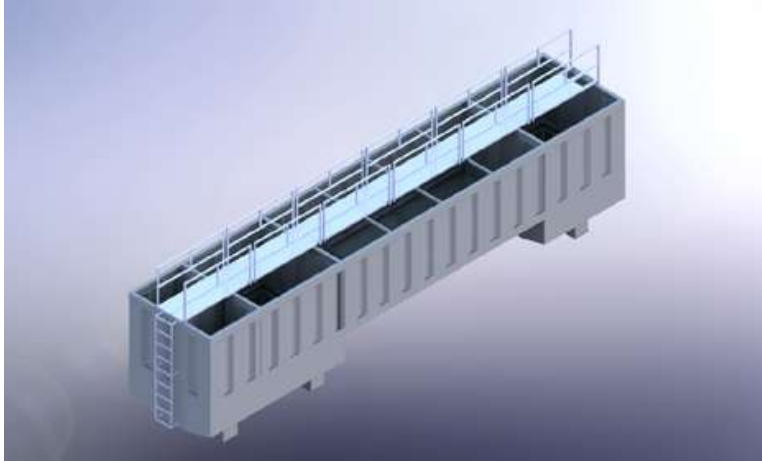

There are two mixers in each precipitation unit, fast and slow. These mixers are used to facilitate mixing of chemicals with water to be treated. There are waiting pools to precipitate suspended solids formed after these mixing processes.

Lamellas are used in these pools to accelerate the collapse. After chemical treatment, the treatment of raw water is usually done by precipitation. Lamella precipitation is generally used to reduce the required precipitation area. Unlike conventional deposition, lamella deposition provides high deposition area in the low surface area, saving space. After settling, the purified water passes into the storage tank, water from the storage tanks is fed by horizontal centrifugal pumps and pressurized to the sand filters.



CONTROL UNIT



Electric board, IP 54 is suitable to contain the power, control, monitoring and alarm devices for the plant. The controls shall be identified by metal plates fixed by screws. All instruments shall be safety anchored and located so as to keep proper geometry, both horizontally and vertically.





HEAD OFFICE

Fatih Sultan Mehmet Mah. Poligon
Cad. Buyaka 2 Sitesi 3 Blok No:8C
İç Kapı No:1 Ümraniye/ İstanbul-
Turkey



FACTORY

Köseler Mah.31.Cad.Kobi OSB No: 14
Dilovası / Kocaeli - Türkiye



+90(216) 526 0426



info@vatekcevre.com

OUR REPRESENTATIVE OFFICES



RIPPALL LTD.

Swan Building, 20 Swan
Street,
Manchester/ENGLAND



VATEK-AL Sh.P.K

Rruga "Reshit Çollaku",
Pallati Nr.38, Shkalla Nr.1,
Apt.7 Kati 4 Tirane/Albania



TRIWA FZCO

Dubai Silicon Oasis, DDP,
Building A1,
Dubai, United Arab Emirates



SAHRA ENGINEERING

Al-Shat Road, Souq Al-
Jumma District,
Tripoli / LIBYA



BEST -TEX INTERNATIONAL

Noor Tower, 6th & 7 th Floor,Plot 18
Sector 11, Garib-E-Newaz Avenue
Uttara - DHAKA/BANGLADESH